



Compact shipping / storage



Rechargeable batteries



Battery housing protectors




A typical system set-up

1. Flexible field rugged design

2. Secure cable termination  
with pulling eye3. In-line rechargeable  
batteries

4. Removable skid / wear collars

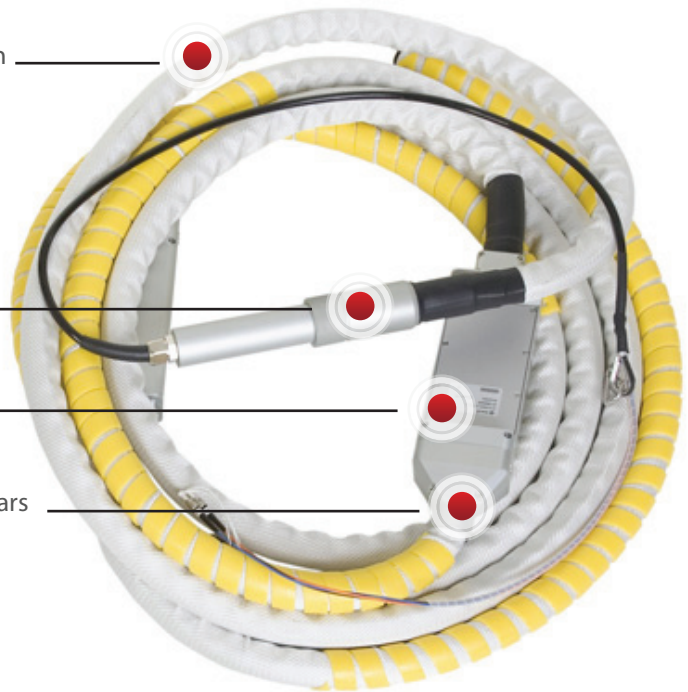

## MALÅ Rough Terrain Antennas

MALÅ Rough Terrain Antenna (RTA) series changes the face of low-frequency Ground Penetrating Radar (GPR) surveying. The unique in-line, all-in-one, antenna design provides improved performance for deeper penetration. The flexible “snake” like design allows the antenna to be maneuvered easily and efficiently through the densest or most uneven of terrain without affecting ground contact, providing optimum results in the most difficult of environments.

The most important benefit being that the operator doesn't have to clear an access path or route prior to the profile or survey.

Even in relatively easy environments the MALÅ RTA outperforms the rest, with proven results showing a significant reduction in survey time and manpower costs. Existing users of the MALÅ RTA report reductions in survey time and manpower requirements to a third of those experienced when using traditional unshielded antennas.

## Brief Description & Technical Specification

Typical system set-up comprises a MALÅ ProEx control unit mounted in a backpack, MALÅ XV Monitor, the RTA, rechargeable batteries and a triggering mechanism (survey wheel, hip chain, or time).

### 30MHz

The MALÅ RTA 30 MHz is suitable for investigations requiring the deepest possible depth penetration.

**Length :** 13.06 m (distance Tx-Rx: 6 m)

**Weight:** 7.8 kg



### 50MHz

The MALÅ RTA 50MHz is suitable for investigations that require medium to deep depth penetration. This was MALÅ Geoscience's first antenna in the MALÅ RTA series and has found wide appeal since it was released in 2004 with a proven track record.

**Length :** 9.25 m (distance Tx-Rx: 4 m)

**Weight:** 7.0 kg



### 100MHz

The MALÅ RTA 100MHz is suitable for investigations that require medium depth penetration with reasonable resolution.

**Length :** 6.56 m (distance Tx-Rx: 2 m)

**Weight:** 6.0 kg



## Applications

The MALÅ RTA series of antennas is rated to IP65 and is recommended for deep geological layer investigations. Although, other applications include: glaciology, archaeological / anthropological investigations, mapping of groundwater resources and depth to bedrock mapping.

## Accessories

A number of accessories are available for the MALÅ RTA antennas, including :

- Towing belt
- Skid plates
- Hip chain

**See our webpage for latest information**

### Corporate Headquarters

MALÅ Geoscience  
Skolgatan 11, SE-930 70  
Malå, Sweden  
Phone: +46 953 345 50  
Fax: +46 953 345 67  
E-mail: sales@malags.com

### Offices

USA: MALÅ Geoscience USA, Inc., 465 Deanna Lane, Charleston, SC 29492  
Phone: +1 843 852 5021, Fax: +1 843 284 0684, E-mail: sales.usa@malags.com

China: MALÅ Geoscience (China), Room 2604, Yuan Chen Xin BLDG, No.12 Yu Min Road Chao Yang District, Beijing 100029  
Phone: +86 108 225 0728, Fax: +86 108 225 0815, E-mail: sales@malags.com